

Industrial LED lighting



Aluminum housing
Easy mounting
IP67 approved
Great price-performance ratio


Technical specifications M9SL a M9R:

- Power consumption and length: 7W (300 mm), 12W (400 mm), 16W (600 mm), 20W (800 mm)
- Input voltage 24 VAC/VDC
- Luminous efficiency 110 lm/W
- Color rendering index 80
- Beam emission angle 110 degrees
- Color of light up to 6500 K
- Aluminum housing
- Lifespan 50 000 hours
- Operating temperature -20...+45 °C
- Connection: clips mounting, 360 degrees adjustable
- IP67 approved

IP67



Dimensions M9SL in mm:

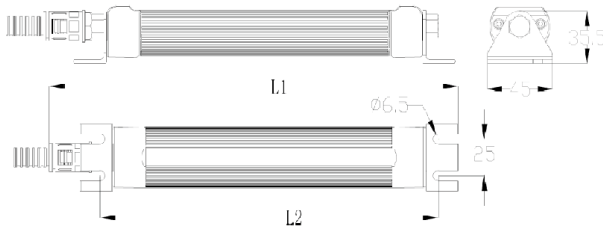

	300S	400S	600S	800S
L1	360	500	700	900
L2	312~332	452~472	652~672	852~872

LED lighting M9SL

Type	Length mm	Power W	Voltage VAC/VDC	EUR/pcs
M9SL-B-1-300S-7W	300	7	24	43,00
M9SL-B-1-400S-12W	400	12	24	50,00
M9SL-B-1-600S-16W	600	16	24	57,00
M9SL-B-1-800S-20W	800	20	24	64,00

Dimensions M9R in mm:



	300S	400S	600S	800S
L1	375	515	715	915
L2	335 ± 3	475 ± 3	675 ± 3	875 ± 3
L3	325 ± 3	465 ± 3	665 ± 3	765 ± 3
L4	315 ± 3	455 ± 3	655 ± 3	755 ± 3

LED lighting M9R

Type	Length mm	Power W	Voltage VAC/VDC	EUR/pcs
M9R-B-1-300S-7W	300	7	24	66,00
M9R-B-1-400S-12W	400	12	24	74,00
M9R-B-1-600S-16W	600	16	24	91,00
M9R-B-1-800S-20W	800	20	24	103,00