


Subminiature Power Relay HF41F with Socket

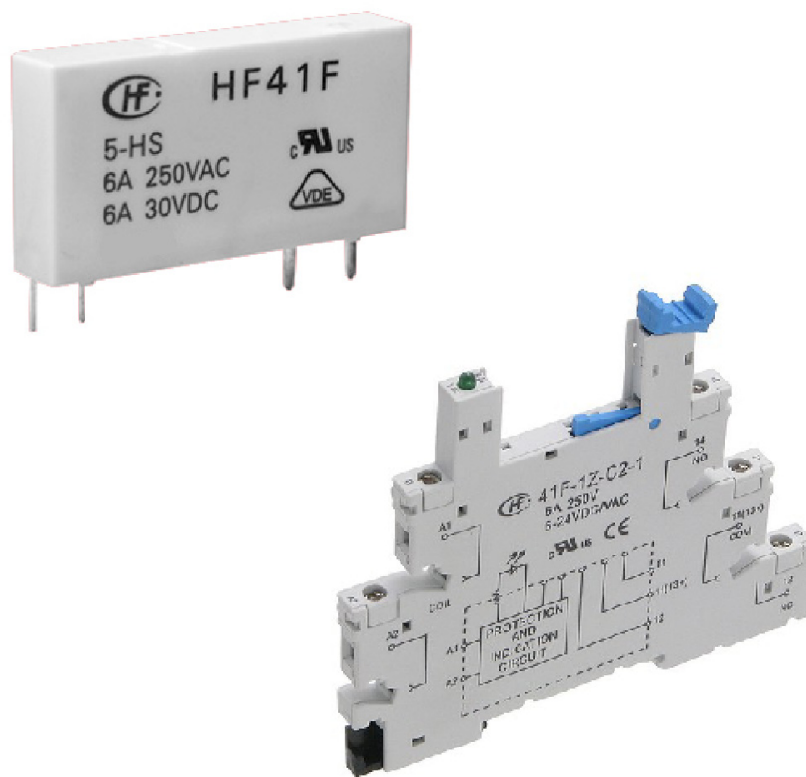


HF41F series
Miniature reliable relay with socket
Slim size 6,2 mm
NO contact or a changeover contact


Subminiature Power Relay HF41F with Socket

Technical Data:

- Slim size – width 5 mm (relay), 6,2 mm (socket)
- Contact rating 6 A / 250 VAC / 30 VDC
- NO contact or a changeover contact
- Coil voltage 12 VDC, 24 VDC, 60 VDC
- High breakdown voltage 4 kV (between coil and contacts)
- Surge voltage up to 6 kV (between coil and contacts)
- Max. switching voltage 400 VAC/125 VDC
- Max. switching power 1 500 V A/180 W
- High sensitive: Approx. 170 mW
- Relay easy to change
- LED indication (socket)
- Protection diode (socket)

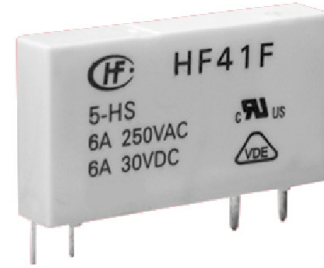


Relay HF41F

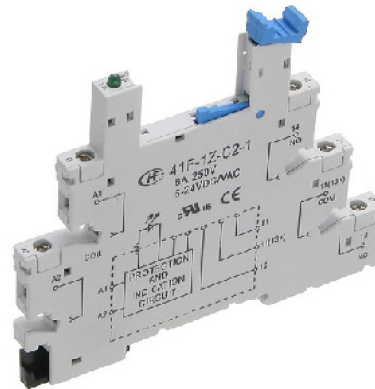

Relay Socket 41F

Dimensions in mm:

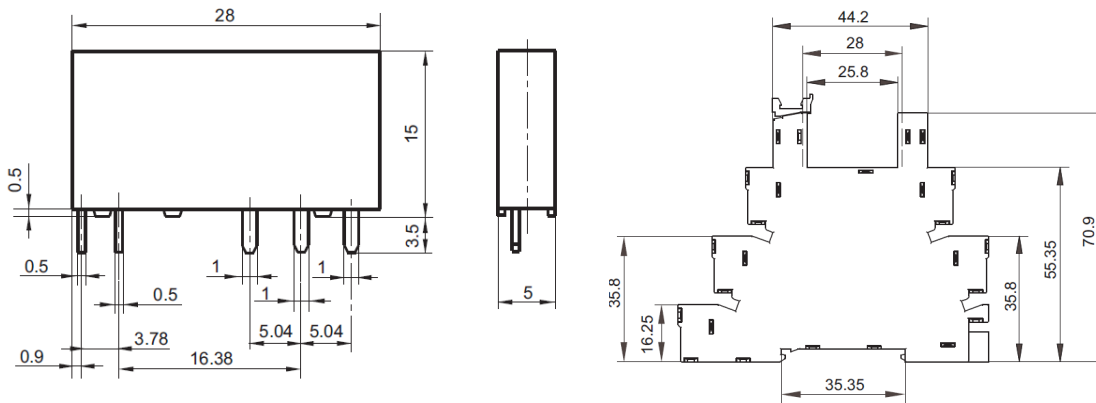

Type	Description	EUR/pcs
HF41F/012 ZS 555	Coil voltage 12 V DC, switching current 6 A, 1-pole, changeover contact	3,50
HF41F/024 ZS 555	Coil voltage 24 V DC, switching current 6 A, 1-pole, changeover contact	3,50
HF41F/060-ZST	Coil voltage 60 V DC, switching current 6 A, 1-pole, changeover contact	5,00
41F-1Z-C2-1	Socket for miniature relay HF41F,12 - 24 VDC, width 6,2 mm	4,50
41F-1Z-C2-4	Socket for miniature relay HF41F, 60 VDC, width 6,2 mm	5,50
41F-S	Separator	0,70

Prices in euros, excl.VAT, non-binding, order discount on request. - Subject to errors and technical changes. - 12/2023