

# Industrial LED lighting



Aluminum housing  
Easy mounting  
IP67 approved  
Great price-performance ratio

## Technical specifications M9SL a M9R:

- Power consumption and lenght 7W (300 mm), 12W (400 mm), 16W (600 mm), 20W (800 mm)
- Input voltage 24 VAC/VDC
- Luminous efficiency 110 lm/W
- Color rendering index 80
- Beam emission angle 110 °
- Color of light up to 6 500 K
- Aluminum housing
- Lifespan 50 000 hours
- Operating temperature -20...+45 °C
- Connection clips mounting, 360 degrees adjustable
- IP67 approved


IP67



type M9SL

## LED lighting M9SL

Type	Total lenght mm	Length mm	Power W	Voltage VAC/VDC	EUR/pcs
M9SL-B-1-300S-7W	360	300	7	24	50,43
M9SL-B-1-400S-12W	500	400	12	24	58,17
M9SL-B-1-600S-16W	700	600	16	24	65,94
M9SL-B-1-800S-20W	900	800	20	24	74,97

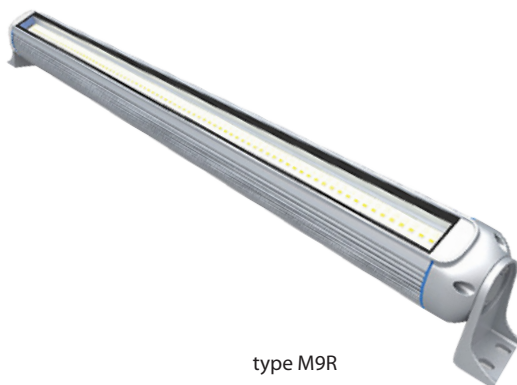

type M9R

## LED lighting M9R

Type	Total lenght mm	Length mm	Power W	Voltage VAC/VDC	EUR/pcs
M9R-B-1-300S-7W	375	300	7	24	77,57
M9R-B-1-400S-12W	515	400	12	24	82,74
M9R-B-1-600S-16W	715	600	16	24	100,83
M9R-B-1-800S-20W	915	800	20	24	108,60